

# SAN Fabric Design Rules

## 3

The sections in this chapter contain SAN fabric design configuration rules for heterogeneous SANs implemented using the HP B-Series product line of Core, Director, and SAN Switch Fibre Channel switch models and the MP Router, the HP C-Series product line of Cisco Director and Fabric Fibre Channel switch models resold by HP, and the HP M-Series product line of Director and Edge Fibre Channel switches

Support is provided for SAN fabrics consisting of the Fibre Channel switches listed in Table 18, [HP StorageWorks B-Series Product Line Switches](#), the switches listed in Table 21, [HP C-Series Product Line Switches](#), or the switches listed in Table 24, [HP StorageWorks M-Series Product Line Switches](#).

For new SAN deployments HP recommends you utilize switch models from a single product line exclusively. To meet the needs of customers desiring a mix of switch models from the different product lines however, HP also supports two levels of SAN fabric interoperability. Specifically, HP supports:

- Within a multi-fabric SAN, one fabric with all B-Series switches and another fabric with all M-Series switches. This is referred to as a "dual heterogeneous SAN fabric"
- Within a single fabric, switch models from different product lines intermixed. This is referred to as an "interoperable heterogeneous SAN fabric". For this level of interoperability, three combinations are supported:
  - B-Series SAN switch models with M-Series Director and Edge switch models
  - B-Series switch models with C-Series switch models
  - C-Series switch models with M-Series switch models

Refer to [Heterogeneous/Interoperable SAN Fabrics](#), page 98, for the fabric interoperability rules and configuration rules for these two levels of interoperability.

The configuration rules for a SAN begin with the SAN fabric rules. These are then modified depending on the specific topology implementation rules, platform or operating system and storage system rules described here and in Chapter 4, "[Heterogeneous SAN Platform and Storage System Rules](#)", and the requirements of applications being run on the SAN. Read the documentation and release notes for all hardware and software products that are being utilized in the SAN for additional configuration information details. See the Preface, "[Related Documents](#)" for a list of related documentation.

## SNIA SSF Configurations

The Storage Networking Industry Association (SNIA) sponsors the Supported Solutions Forum (SSF). SSF is a storage industry program that improves the interoperability of Fibre Channel products. HP is a member of SNIA and SSF.

HP supports a number of Fibre Channel switch models in configurations that are compliant with the guidelines defined by the SNIA Supported Solutions Forum. SSF has defined numerous configurations with heterogeneous servers and heterogeneous storage systems.

For additional information on this program, refer to <http://www.snia.org/ssf>

## Supported HP StorageWorks Router Models

HP supports four router products/functionalities providing multiple routing and SAN extension capabilities. Table 17 lists the currently supported HP router products along with the supported protocols and supported Fibre Channel switch product lines. Refer to Chapter 7, "SAN Extension" for FCIP and iSCSI configuration rules. Additionally, for information on HP support of certain third party SAN Extension products, refer to the *Continuous Access and Data Replication Manager SAN Extensions Reference Guide*:

<http://h200002.www2.hp.com/bc/docs/support/SupportManual/c00062684/c00062684.pdf>

**Table 17: HP StorageWorks Router Products**

HP StorageWorks Router Name	Firmware Version	Number of Ports	Supported Protocol(s)	Supported Switch Product Line(s)
HP StorageWorks Multi-Protocol Router	7.1.2c	8/16 Refer to Table 19	Fibre Channel Routing, FCIP	B-Series
C-Series Inter-VSAN Routing	1.34a	Refer to Table 22	Fibre Channel Routing	C-Series
4/8-Port IP Storage Services module	2.0.1b	4/8	iSCSI, FCIP	C-Series
Multiprotocol Service module	2.0.1b	2	iSCSI, FCIP	C-Series
HP StorageWorks SR2122-2 IP Storage Router	3.4.5	2 Fibre Channel/2 GigE	iSCSI, FCIP	B-Series, C-Series, M-Series
HP StorageWorks SR2122 iSCSI Storage Router	3.1.1	2 Fibre Channel/2 GigE	iSCSI	B-Series, C-Series, M-Series

## Supported Switch Models – B-Series Product Line

HP supports 1 Gbps, 2 Gbps, and 4 Gbps SAN B-Series product line Fibre Channel switch models. These switch models include legacy products released by HP and Compaq. The relationship between the HP and Compaq switch products is shown in Table 18. Refer to the section, [SAN Fabric Rules – B-Series Product Line](#), for specific switch model support rules.

**Note:** Refer to the following Web page for the latest information on supported B-Series Fibre Channel switch models and firmware versions:

<http://h18006.www1.hp.com/storage/saninfrastructure.html>

**Table 18: HP StorageWorks B-Series Product Line Switches**

HP StorageWorks Switch Name		Firmware Version	Number of Ports
HP StorageWorks MSA SAN switch 2/8		3.2.0	8
HP StorageWorks SAN Switch 2/8 EL, 2/8 power pack			8
HP StorageWorks SAN Switch 2/16, 2/16 EL, 2/16 power pack			16
HP StorageWorks SAN Switch 2/8V TAA, 2/8V TAA power pack		4.4.0	8
HP StorageWorks SAN Switch 2/16V, 2/16V TAA, 2/16N FF, 2/16N power pack, 2/16N FF TAA, 2/16N TAA power pack			16
HP StorageWorks SAN Switch 2/32, 2/32 power pack			32
HP StorageWorks Core Switch 2/64, 2/64 power pack			64 (2 switches per chassis, for a total of 128 ports per chassis)
HP StorageWorks SAN Director 2/128, 2/128 power pack			128
HP StorageWorks SAN Switch 4/32 base/full			16/32
HP StorageWorks SAN Switch 4/32 power pack			32
HP Switch Name	Compaq StorageWorks Switch Name		Number of Ports
HP Brocade 2400 (HP reseller)	Compaq StorageWorks SAN Switch 8	2.6.2b	8
N/A	Compaq StorageWorks SAN Switch 8-EL		8
HP Brocade 2800 (HP reseller)	Compaq StorageWorks SAN Switch 16		16
N/A	Compaq StorageWorks SAN Switch 16-EL		16
HP Surestore FC Switch 6164 (64 ISL Ports)	Compaq StorageWorks SAN Switch Integrated/32 (64 ISL Ports)		32 (counts as 6 switches and 2 hops when applying configuration rules)
HP Surestore FC Switch 6164 (32 ISL Ports)	Compaq StorageWorks SAN Switch Integrated/64 (32 ISL Ports)		64 (counts as 6 switches and 2 hops when applying configuration rules)
HP Surestore FC 1Gb/2Gb Entry Switch 8B	N/A	3.2.0	8
N/A	Compaq StorageWorks SAN Switch 2/8-EL		8
N/A	Compaq StorageWorks SAN Switch 2/16-EL		16
HP Surestore FC 1Gb/2Gb Switch 8B	N/A		8
HP Surestore FC 1Gb/2Gb Switch 16B	Compaq StorageWorks SAN Switch 2/16		16

## SAN Fabric Rules – B-Series Product Line

All switch models shown in Table 18 are supported in the HP StorageWorks SAN provided that the same firmware versions and switch settings for each switch model family are utilized for the corresponding models listed, and specific switch model configuration rules are followed. For additional information on operating system HBA/driver/firmware/software support, contact your HP field representative.

- For SAN fabrics consisting exclusively of Compaq switch models or a mix of pre-merger HP and pre-merger Compaq switch models (Compaq StorageWorks switch name, HP switch name, or Brocade switch name sold by HP in the above table), use the Compaq default switch settings. Configuration files with these settings are available from HP Services.
- For SAN fabrics consisting exclusively of pre-merger HP switch models (HP switch name or Brocade switch name sold by HP in the above table), utilize pre-merger HP switch settings. Configuration files with these settings are available from HP Services.

---

**Note:** The HP StorageWorks switches listed utilize common settings by default.

---

### Fabric and Switch Model Maximums - B-Series Product Line

The fabric maximums listed are for B-Series switch model SAN fabrics utilizing HP XP128/1024, XP48/512, XP256, VA7100, VA7110, VA7400, VA7410, Enterprise Virtual Array (EVA), EMA/ESA12000, EMA16000, MA/RA8000, MA6000, MSA1000, MSA1500, RA4000, or RA4100 storage systems. Refer to Chapter 4 for specific operating system support for each storage system type based on the switch product line used.

In general, these fabric rules also apply to Continuous Access XP, EVA, and DRM for EMA/ESA12000, EMA16000, and MA/RA8000. Refer to Chapter 4 of this guide and the Continuous Access EVA Design Reference Guide for additional details.

The following rules are for SAN fabrics implemented with the switch FW versions listed in Table 18, unless otherwise stated.

1. Up to 34 switches and up to 1280 total ports in a single SAN fabric. Each fabric may contain any combination of supported 1 Gbps and 2 Gbps switch models listed, provided the individual switch model fabric limits listed below are not exceeded.
2. HP StorageWorks SAN Switch 4/32 - 4 Gbps port speed supported only for ISL connectivity between 4/32 switches.
3. The HP StorageWorks SAN Director 2/128 - maximum of 10 chassis total per fabric, each chassis adds 1 to the fabric switch count.
4. The HP StorageWorks Core Switch 2/64 – maximum of 10 chassis total per fabric, each chassis contains 2 logical switches (See Figure 33), thus 10 chassis add 20 to the fabric switch count.

The Core Port Identifier (PID) addressing mode is required on all other switches in the same fabric with the HP StorageWorks SAN Switch 2/32, Core Switch 2/64, and SAN Director 2/128. Refer to [SAN Core and SAN Switch Addressing Mode](#).

5. For SAN fabrics containing any 1 Gbps switch models utilizing 2.6.x or later firmware, the maximum number of user ports supported is 728. With Security enabled, the maximum number of user ports supported is 500.

For SAN fabrics containing exclusively 2 Gbps switch models, the maximum number of user ports supported is 1280. With Security enabled, the maximum number of user ports supported is 728.

6. For SAN fabrics with Security enabled, the Security database sizes are limited as follows.
  - In a mixed fabric with 1 and 2 Gbps switches, the maximum size of the security database is 32 KB, with only 16 KB active.
  - In a 2 Gbps only fabric, the security database size can be 128 KB, with 64 KB active.
  - For all 1 Gbps/2Gbps mixed fabrics, the maximum number of Device Connection Control (DCC) policies is limited to 620.
7. Zoning database size limits - For SAN fabrics containing 1 Gbps switch models utilizing 2.6.1x or later firmware, or 2 Gbps switch models utilizing 3.1x or later firmware, the zoning database size must not exceed 96 KB.  
For SAN fabrics containing 2 Gbps switch models utilizing 4.1x or later firmware, the zoning database size must not exceed 128 KB.

---

**Note:** Use the "cfgSize" command to determine the size of the Zoning database.

---

8. StorageWorks SAN Switch Integrated 32 or 64, HP Surestore FC Switch 6164 – maximum of 4 chassis total per fabric, each chassis adds 6 switches to the fabric switch count. Maximum fabric configuration is 4 chassis with 4 other SAN switch model switches.
9. Up to 7 switch hops (8 switches) maximum between any two devices in a SAN fabric. Each SAN Switch Integrated 32 or 64 or HP Surestore FC Switch 6164 model switch utilized in a fabric adds up to 2 hops to the hop count between devices depending on the specific device-to-switch connections and device-to-device access. (refer to Chapter 2, Figure 6 and Figure 7).
10. StorageWorks SAN Switch 2/8-EL – By default, this switch is supported in SAN fabrics with up to 4 switches total only. A license upgrade is available to allow these switches to be upgraded for support in larger fabrics with greater than 4 switches total.
11. HP Surestore FC 1Gb/2Gb Entry Switch 8B – Supported with a single E-port connection.
12. Compaq Fibre Channel Storage Switch 8 or Fibre Channel Storage Switch 16 models– up to 4 switches total per fabric using these model switches only, or when intermixed with 1 Gbps SAN switches.

---

**Note:** Intermixing of Compaq Fibre Channel Storage Switch 8 and Fibre Channel Storage Switch 16 models and 1 Gbps StorageWorks SAN Switch models requires compatibility mode (VC Encoded Address Mode) be set in the SAN Switches (refer to the SAN Switch documentation). Intermixing of 1 Gbps Compaq Fibre Channel Storage Switch 8 or Fibre Channel Storage Switch 16 switch models and 2 Gbps switch models is not supported

---

13. The Compaq FC-AL Switch 8 is supported for cascaded attachment to the SAN through a single FL-port on a Compaq SAN Switch 8, SAN Switch 16, SAN Switch 8-EL, or SAN Switch 16-EL. In this configuration, RA4000/4100 storage systems are accessible only from servers attached directly to the FC-AL switch.

**Note:** Cascaded attachment of the FC-AL Switch 8 connected to 2 Gbps switch models is not supported

14. Within a single fabric where switches are interconnected, each switch must have a unique domain number (Domain ID) and a unique World Wide Name (WWN). All switch configuration parameters in each switch must be the same.

**Note:** Do not configure any switches with a domain ID of 8. HP-UX systems reserve domain 8 for Private Loop devices.

15. Optional switch features may be used on any switch in the fabric if the feature is supported on that switch. This includes features such as ISL Trunking, QuickLoop, Fabric Watch, Advanced Performance Monitoring, and Extended Fabrics. Refer to the switch model specific documentation to determine which features are available for a given switch model.
16. Any mix of servers and storage systems is allowed in a SAN provided the specific platform, operating system, and storage system fabric limits and rules are followed. Refer to the appropriate sections in this guide and the documentation listed in the section "Related Documents" in the preface.
17. HP requires that all switches in a single fabric or multi-fabric SAN use the same switch firmware revision for each switch model family. Two successive fabric firmware versions can be temporarily used in one fabric or multiple fabrics in a SAN during switch firmware rolling upgrades.
18. For B-Series product line, Table 18 Fibre Channel switches – Up to 15 switches configured in a single ring with a Ring SAN fabric topology and no cascaded switches. Up to 22 switches in a Ring SAN fabric with cascaded switches, provided that no more than 11 switches are in a ring and no more than 11 switches are outside of the ring. One outside switch is cascaded from each of the 11 ring switches.


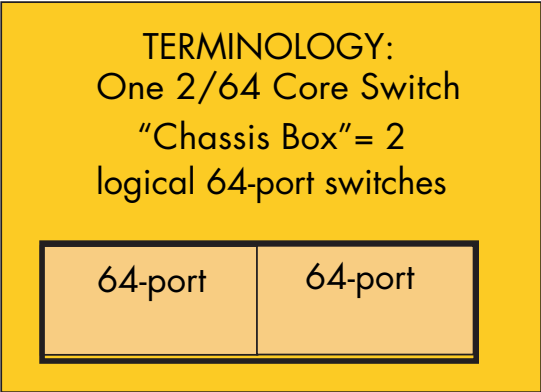


Figure 33: Core Switch definition

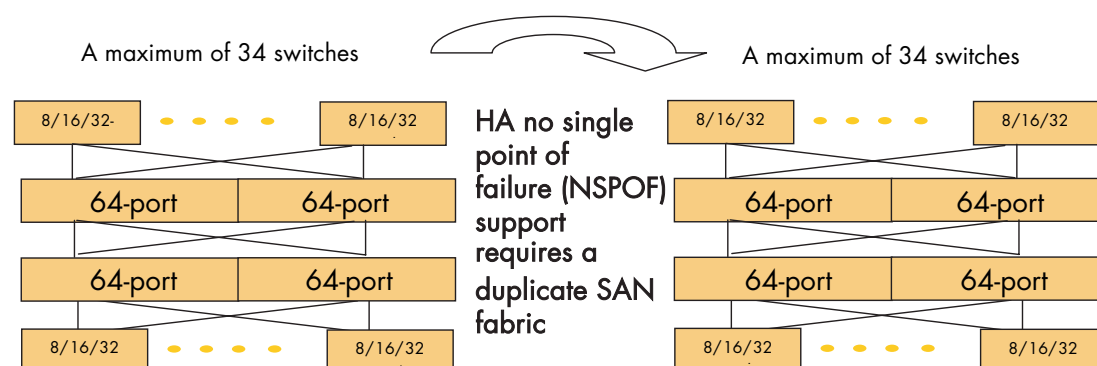

**Figure 34: Two Fabrics for no single point of failure high availability**

See also Chapter 2, [Figure 20](#).

## Fabric and MP Router Maximums – B-Series Product Line

The MP Router maximums listed in this section describe the rules and limits when using the MP router for Fibre Channel routing in SAN fabrics consisting of any of the B-Series switch models listed in Table 18. The rules apply for fabrics utilizing HP XP128/1024, XP48/512, VA7100, VA7110, VA7400, VA7410, Enterprise Virtual Array (EVA), EMA/ESA12000, EMA16000, MA/RA8000, MA6000, MSA1000, or MSA1500 storage systems. Refer to Chapter 4 for specific operating system support for each storage system type based on the switch product line used.


Table 19 lists the scalability rules for Meta SANs utilizing the MP Router. Refer to Figure 36 and Figure 36 for additional descriptions of terminology used in the rules listed in the table.

**Table 19: HP StorageWorks MP Router Scalability Rules**


Edge Fabric Scalability		
Domains (see Figure 36)	Maximum number of front domains (# EX-ports) per edge fabric	24
	Maximum number of translate domains (# of remote fabrics) per edge fabric	6
	Maximum number of physical switches in an edge fabric	34
	Maximum number of total domains per edge fabric (physical domains + front domains + translate domains)	64
Devices (User Ports)	Maximum number of local and remote devices per edge fabric (For edge fabrics with greater than 600 devices, v4.2.0c or later is required for all switches in the fabric when using the MP Router)	1280
	Maximum number of imported devices per edge fabric	1000
LSAN Zone Scalability		
Zoning	Maximum number of entries per LSAN zone	200
Routed Fabrics (Meta SAN) Scalability		
Edge Fabrics	Maximum number of edge fabrics connected to a routed fabric	32
Meta SAN	Maximum number of total ports per routed fabric	4000
Routers	Maximum number of MP Routers per routed fabric	3

**Table 19: HP StorageWorks MP Router Scalability Rules**

LSAN	Maximum number of LSAN device entries per routed fabric	3000
	Maximum number of LSAN zones per routed fabric	1000
<b>Hop Count Scalability</b>		
Hop Count	Maximum number of hops between switches (including routers) in a Meta SAN. See Figure 35 – diagram of hop counts	7

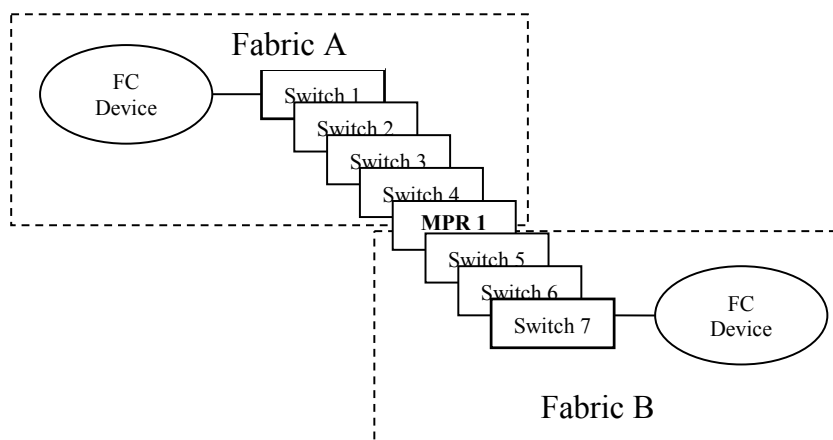

7 hops using 1 MP Router

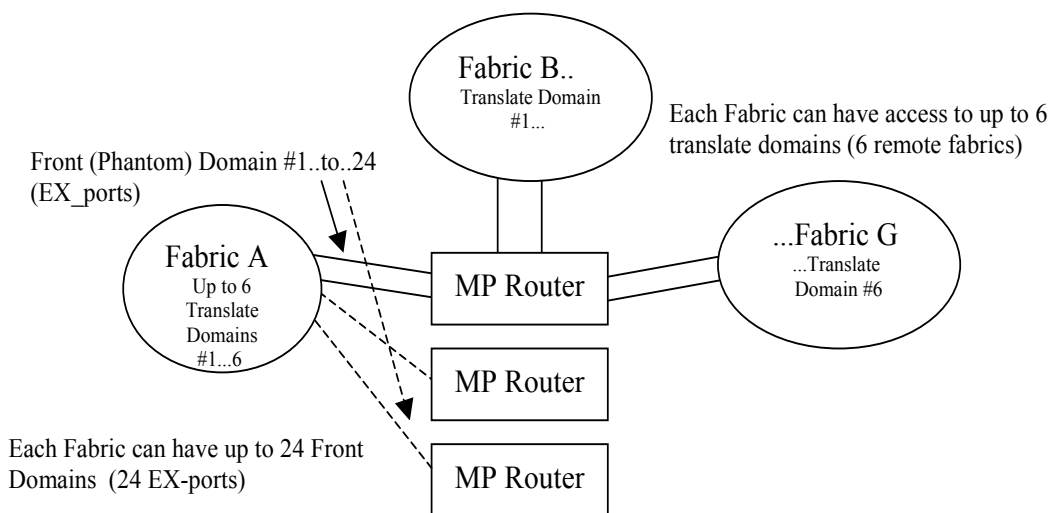**Figure 35: Maximum hop count****Figure 36: Front and translate domains**

### Additional MP Router Configuration Rules

1. All configurations must use the default settings for R\_A\_TOV (10000 seconds) and E\_D\_TOV (2000 seconds).
2. Direct connectivity of devices to MP Router ports is not supported. All devices in a Meta SAN must be connected to Fibre Channel switch ports.



3. SAN boot through the MP Router is not currently supported.
4. For redundancy, HP recommends that a minimum of 2 EX-Ports (MP Router ISLs) be used for each fabric connected to the MP Router. The number of EX-Ports required is based on the performance requirements for all devices being shared between fabrics through the MP Router.
  - For initial settings, calculate the number of EX-Ports using a 5:1 ratio of standard ISLs or switch device ports to MP Router EX-Port ISLs. Monitor port performance to determine if this ratio is acceptable based on usage (use the “portperfshow” command to monitor MP Router port performance).
  - For very high bandwidth requirements and applications, use a ratio of 3:1 or 1:1.

## MP Router XPath OS and Fibre Channel Switch and Fabric OS Compatibility

Table 20 summarizes the B-Series Fibre Channel switch models and firmware versions that are supported with the MP Router XPath OS v7.1.2c.

**Table 20: XPath OS v7.1.2 Supported B-Series Switches and Firmware**

	1 Gb	2 Gb 2/8, 2/8-EL, 2/16, 2/16-EL, Surestore 8B, 16B	2 Gb 2/8V, 2/16V, 2/16N, 2/32, 2/64, 2/128	4 Gb 4/32	Fabric Manager <sup>1</sup>
HP Minimum Versions	v2.6.2a	v3.1.2a	v4.2.2a	v4.4.0	v4.4
HP Recommended Versions	v2.6.2b	v3.2.0	v4.4.0	v4.4.0	v4.4

1. The use of Fabric Manager is strongly recommended in all configurations utilizing the MP Router

## SAN Core and SAN Switch Addressing Mode

When using products from the B-series product line, two different addressing modes are available. As SAN configurations grow to include more switches, HP recommends that the “Core Switch” addressing mode should be used. This is obtained by setting the Core Switch PID configuration parameter bit.

Certain switches previously supplied by HP and Compaq were shipped with the Core Switch PID configuration bit cleared. When the switches are operated in this mode, certain restrictions apply regarding the maximum number of switches in a fabric and the maximum number of ports on a switch. If a StorageWorks Core Switch 2/64, SAN Director 2/128, or StorageWorks SAN switch 2/32 is used anywhere in a fabric, then all the switches in the fabric must have the Core Switch PID configuration bit set. Currently, all switches are shipped with the Core Switch PID bit set.

---

**Note:** The MP Router supports using different PID formats on different fabrics and routing frames between them.

---

SAN managers with existing fabrics that have switches with the Core PID bit cleared must decide whether to set the Core Switch PID bit now or later. The trade-offs are as follows:

- All switches in a fabric must have the same Core Switch PID bit setting, whether it is set or cleared, otherwise the fabric will segment. It must be set on all switches if a StorageWorks SAN switch 4/32, StorageWorks Core Switch 2/64, SAN Director 2/128, or StorageWorks SAN switch 2/32 is part of the fabric.
- With two fabrics, the Core Switch PID can be changed on one fabric at a time, allowing the SAN storage system to operate during the changeover.
- HP-UX and IBM AIX systems use the address bits to identify logical units, when the addressing bits are changed, the logical unit definitions must also be changed. This requires a reboot of the servers and cannot be done without taking down the entire SAN storage system in a planned maintenance scenario.
- If the existing switches in a fabric have the Core PID bit cleared, this bit will need to be cleared on any new switches added, since all switches ship with the Core PID bit set.

HP recommends that this change be performed to avoid potential problems in the future. Additional information on the Core Switch PID is available at:

<http://h18006.www1.hp.com/storage/saninfrastructure.html>

## Supported Switch Models – C-Series Product Line

HP currently supports six models of the C-Series product line 2 Gbps Fibre Channel Switches, the Cisco MDS 9506, 9509, 9216/9216A, 9216i, 9120, and the 9140.

**Note:** Refer to the following Web page for the latest information on supported C-Series Fibre Channel switch models and firmware versions:

<http://h18006.www1.hp.com/storage/saninfrastructure.html>

**Table 21: HP C-Series Product Line Switches**

Switch Name	Firmware Version	Maximum Number of Fibre Channel Ports
MDS 9506	1.2.1a, 1.2.1b, 1.3.4a, 2.0.1b HP recommends FW version 1.3.4a or above	128
MDS 9509		224
MDS 9216/ 9216A		48
MDS 9216i		46
MDS 9120		20
MDS 9140		40

## SAN Fabric Rules – C-Series Fabric Product Line

The following rules are for SAN fabrics implemented with the switch FW versions listed in Table 21, unless otherwise stated.

1. The MDS 9506 is supported with up to 128 ports, over 4 slots (4-32 port modules). The 32-port module for the MDS 9000 product line utilizes 3.2:1 oversubscription for optimized connectivity of low to mid-range host devices and low-end tape libraries. HP recommends the use of the 16 port module for performance intense host applications, disk storage systems, and high-end tape libraries, as well as ISLs. This will decrease the actual port count of the switch.

2. The MDS 9509 is supported with up to 224 ports, over 7 slots, each filled in with a 7-port to 32-port module. The 32-port module for the MDS 9000 product line utilizes 3.2:1 oversubscription for optimized connectivity of low to mid-range host devices and low-end tape libraries. HP recommends the use of the 16 port module for performance intense host applications, disk storage systems, and high-end tape libraries, as well as ISLs. This will decrease the actual port count of the switch.
3. The MDS 9216/9216A has a basic configuration with 16 ports. It has an expansion slot that supports either a 16 or a 32 port Fibre Channel card.
4. The MDS 9216i has a basic configuration with 14 Fibre Channel ports and 2 iSCSI/FCIP ports. It has an expansion slot that supports any one of the following modules; 16 port Fibre channel, or 32 port Fibre Channel card.
5. The MDS 9120 is a fixed 20 port configuration. It has 4 full rate ports and 16 oversubscribed ports.
6. The MDS 9140 is a fixed 40 port configuration. It has 8 full rate ports and 32 oversubscribed ports.
7. The MDS 9506, MDS 9509, and MDS 9216 models also support the IP Storage services 8-Port 1xGE module and the IP Storage services 4-Port 1xGE module that both provide integrated FCIP and iSCSI functionality. HP recommends the use of these blades for integrated deployment and FCIP implementation for business continuity applications.
8. The MDS 916/9216A, MDS 9216i, MDS 9506, and MDS 9509 also support the Multiprotocol Service Module (14 Fibre Channel ports & 2 iSCSI/FCIP ports).

## Fabric and Switch Model Maximums - C-Series Product Line

The fabric maximums listed are for C-Series switch model SAN fabrics utilizing HP XP128/1024, XP48/512, VA7110/7410, Enterprise Virtual Array (EVA), EMA/ESA12000, EMA16000, MA/RA8000, MA6000, MSA1000, and MSA1500 storage systems. Refer to Chapter 4 for specific operating system support for each storage system type based on the switch product line used.

In general, these fabric rules also apply to Continuous Access XP, EVA, and DRM for EMA/ESA12000, EMA16000, and MA/RA8000 storage systems. Refer to Chapter 4 of this guide and the Continuous Access EVA Design Reference Guide for additional details.

1. Up to 24 MDS switches with up to 3000 ports total in a SAN fabric
2. Up to 12 MDS 9506 or MDS 9509 Directors with up to 10 MDS 9216/9216A/9216i, 9120, or 9140 Fabric switches.
3. Up to 12 MDS 9506 or 9509 Directors in an all Director fabric

**Table 22: C-Series Fabric and VSAN/Inter-VSAN Routing Maximums**

Maximum number of total ports per fabric	3000
Maximum number of user ports (device ports) per fabric	2500
Maximum number of hops per fabric	7
Maximum number of VSANs per fabric	40
Maximum number of inter-VSAN shared devices per routed fabric	2000
Maximum number of inter-VSAN zones per routed fabric	200

# Zoning and VSANs

Table 23 indicates how zoning is implemented for the Cisco MDS switches.

1. In HP C-Series SANs, Virtual Storage Area Networks (VSANs) are defined as separate instances of all fabric services, including address space. HP supports 40 VSANs per physical fabric.
2. The maximum number of zones across all VSANs is 2048.
3. The maximum number of zone members across all VSANs is 20,000.
4. The maximum number of ports in VSAN when using inter-VSAN routing is 3000.
5. The maximum number of devices that can be shared in a VSAN using inter-VSAN routing is 2000


**Table 23: Zone Types on HP fabric switches**

Switch Models	Configuration	Enforcement	Comments
Cisco MDS 9506 Cisco MDS 9509 Cisco MDS 9216/9216A/9216i Cisco MDS 9120 Cisco MDS 9140	Define zones using all domain#/port#  Define zones using all WWNs  Define zones using a combination of domain#/port# and WWNs	Access authorization at frame level in hardware	HARD zoning

# Mixed Storage Common SAN Rules

Refer to Chapter 4 for specific storage rules related to the C-Series switches.

# C-Series High Availability VSAN Management Configuration

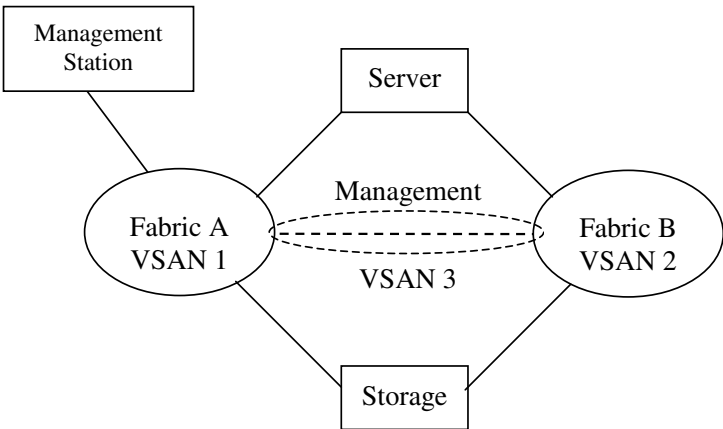

**Figure 37: C-Series High Availability VSAN Management Configuration**

Figure 37 shows a typical high availability configuration with server and storage connections to different fabrics for high availability. This provides two paths for data access between servers and storage. The addition of an ISL between Fabric A and Fabric B allows both fabrics to be managed through a single management station. This configuration is classified as a level 3 high availability configuration. Refer to Chapter 2, "[Data Availability in a SAN](#)", page 63 for information about levels of data availability in a SAN.

## Supported Switch Models – M-Series Fabric Product Line

HP supports a range of 1 Gbps and 2 Gbps M-Series Fabric product line Fibre Channel switch models. These switch models represent products supported by both pre-merger HP and pre-merger Compaq. The relationship between the pre-merger and post-merger switch products is shown in Table 24. Refer to the section, [SAN Fabric Rules – M-Series Fabric Product Line](#), for specific switch model support rules.

**Note:** Refer to the following Web page for the latest information on supported M-Series Fibre Channel switch models and firmware versions:

<http://h18006.www1.hp.com/storage/saninfrastructure.html>

**Table 24: HP StorageWorks M-Series Product Line Switches**

HP StorageWorks Switch Name		Firmware Version	Number of Ports
HP StorageWorks edge switch 2/12		06.02.00-22	4 to 12
HP StorageWorks edge switch 2/16			16
HP StorageWorks edge switch 2/24			8 to 24
HP StorageWorks edge switch 2/32			16 to 32
HP StorageWorks director 2/64			32 to 64
HP StorageWorks director 2/140			64 to 140
HP Switch Name	Compaq Switch Name		Number of Ports
N/A	McDATA ES-3016 (Compaq reseller)	06.02.00-22	16
N/A	McDATA ES-3032 (Compaq reseller)		32
McDATA ED-5000 (McDATA reseller)		04.01.01-2	32
HP Director FC-64	Compaq StorageWorks SAN Director 64	06.02.00-22	64

## SAN Fabric Rules – M-Series Fabric Product Line

All switch models shown in Table 24 are supported in the HP StorageWorks SAN provided that the same firmware versions and switch settings are utilized for all models with the exception of the ED-5000. The ED-5000 utilizes a unique firmware version, this version is compatible with the other switch model versions. The default switch settings for this family of switches from pre-merger HP and pre-merger Compaq are the same.

## Fabric and Switch Model Maximums - M-Series Fabric Product Line

The fabric maximums listed are for M-Series switch model SAN fabrics utilizing HP XP12000, XP128/1024, XP48/512, XP256, VA7100, VA7110, VA7400, VA7410, Enterprise Virtual Array (EVA), EMA/ESA12000, EMA16000, MA/RA8000, MA6000, or MSA1500/1000 storage systems. Refer to Chapter 4 for specific operating system support for each storage system type based on the switch product line used.

In general, these fabric rules also apply to Continuous Access XP, EVA, and DRM for EMA/ESA12000, EMA16000, and MA/RA8000. Refer to Chapter 4 of this guide and the Continuous Access EVA Design Reference Guide for additional details.

The following rules are for SAN fabrics implemented with the switch FW version listed in Table 24 and 07.x or 08.x HAFM. The ED-5000 requires 04.01.00-16 switch FW and a minimum of 04.02.00 HAFM.

1. Up to 24 switches with up to 1632 total ports and a maximum of 1024 user ports are supported in a single SAN fabric. Each fabric may contain any combination of supported 1 Gbps and 2 Gbps switch models listed, provided the individual switch model fabric limits listed below are not exceeded.
  - HP StorageWorks director 2/64 and HP StorageWorks director 2/140 – maximum of 8 Directors total per fabric

---

**Note:** With eight fully populated HP StorageWorks director 2/140's, it is physically possible to exceed the 1024 user port maximum. The restriction is in the zoning configuration, as only 1024 unique zone members (user ports) can be configured. However, the remaining ports can be used as Inter Switch Link (ISL) connections in the fabric.

---

- Up to 16 switches with up to 512 total ports in a single fabric that includes one or more McDATA ED-5000 Directors.
2. Up to 3 switch hops (4 switches) maximum between any two devices in a SAN fabric.
  3. Within a single fabric where switches are interconnected, each switch must have a unique domain number (Domain ID) and a unique World Wide Name (WWN). All switch configuration parameters in each switch must be the same.

---

**Note:** Do not configure any switches with a domain ID of 8. HP systems reserve domain 8 for Private Loop devices.

---

4. Zoning maximums - Table 25 lists the configuration limits for zones members, zones, and zone sets in the HAFM.

**Table 25: Zoning configuration supported limits for M-Series**

Zoning Parameter	Firmware 05.xx.xx (Maximum)	Firmware 06.xx.xx (Maximum)
Number of zone members in a zone	1024	2048
Number of zones in a zone set	1024	1024
Number of unique zone members in a zone set	1024	2048
Total number of zone members in a zone set (where a zone member can be in multiple zones)	2048	4096
Characters per zoning name	32	32

**Table 25: Zoning configuration supported limits for M-Series**

Zoning Parameter	Firmware 05.xx.xx (Maximum)	Firmware 06.xx.xx (Maximum)
Number of unique zone members in HAFM Zoning Library	2048	2048
Number of zones in HAFM Zoning Library	1024	1024
Number of zone sets in HAFM Zoning Library	64	64
Number of end ports	1024	1024
Number of devices supported (including loop devices)	1024	1024

- Any mix of servers and storage systems is allowed in a SAN provided the specific platform, operating system, and storage system fabric limits and rules are followed. Refer to the appropriate sections in this guide and the documentation listed in the section "Related Documents" in the Preface.
- HP requires that all switches in a single fabric or multi-fabric SAN use the same switch firmware revision for the models that utilize the same firmware versions. Two successive fabric firmware versions can be temporarily used in one fabric or multiple fabrics in a SAN during switch firmware rolling upgrades.
- For M-Series Fabric product line, Table 24 Fibre Channel switches – Up to 7 switches configured in a ring with a Ring SAN fabric topology.

## General ISL Rules - All Fabric Product Lines

When designing a fabric using 8-port, 16-port, 24-port, and 32-port switches, all ports may be used as ISLs with a maximum of one half of the total port count as ISLs to the same destination (may be license limited on some switch models). This feature is used in the Surestore FC Switch 6164 and StorageWorks SAN Switch Integrated 32 and 64 configurations, which are made up of multiple 16-port switches in an integrated mechanical chassis package. However, there are restrictions in the use of ISLs on some higher port count Fibre Channel switch models, as shown in Table 26.

**Table 26: Number of ISLs for Fibre Channel switch products**

HP Switch Product Name	Compaq Switch Name	Total Number of Available Users Ports	Number of Ports That May Be Used as ISLs
HP StorageWorks SAN Director 2/128		128	128
HP StorageWorks Core Switch 2/64		64 per switch, 128 per chassis	64 per switch, 128 per chassis
MDS 9000 32 Port Fibre Channel Module		32	8 <b>Note:</b> 3 User ports are disabled for each port configured as ISL. HP recommends the MDS 9000 16 Port Fibre Channel Module for ISL connections
MDS 9120		20	4 <b>Note:</b> for every ISL port configured beyond the initial 4, 3 User ports must be disabled.
MDS 9140		40	8 <b>Note:</b> for every ISL port configured beyond the initial 8, 3 User ports must be disabled.
McDATA ED-5000		32	4



**Table 26: Number of ISLs for Fibre Channel switch products**

HP Switch Product Name	Compaq Switch Name	Total Number of Available Users Ports	Number of Ports That May Be Used as ISLs
Director FC64	StorageWorks SAN Director 64	64	32
HP StorageWorks Director 2/64		64	48 or 75% of installed ports
HP StorageWorks Director 2/140		140	70 or 50% of installed ports

## Heterogeneous/Interoperable SAN Fabrics

HP supports three configurations of interoperable heterogeneous SAN fabrics:

- SAN fabric with a mix of B-Series and M-Series switch models.
- SAN fabric with a mix of B-Series and C-Series switch models.
- SAN fabric with a mix of C-Series and M-Series switch models.

HP also supports a dual heterogeneous SAN where one fabric consists exclusively of B-Series Fibre Channel switches, and a second fabric consists exclusively of M-Series Fibre Channel switches.

### Dual Heterogeneous SAN Fabrics

Dual Heterogeneous SAN Fabrics are supported where one SAN fabric consists exclusively of the Fibre Channel switches listed in [Table 18](#), HP StorageWorks B-Series Product Line Switches and the second SAN fabric consisting exclusively of the switches listed in [Table 24](#), HP StorageWorks M-Series Product Line Switches.

While each fabric could be designed to the maximum configuration for the applicable HP StorageWorks Series of Fibre Channel switches, good practice is to use the same configuration on both SAN fabrics. Symmetry is not a requirement, however, as a general rule, this maintains balanced SAN performance and also aids in understanding the configuration. In order to accomplish this, both fabrics should be designed to the least common design maximums between the two series of Fibre Channel switches. For example; HP StorageWorks B-Series product line Switches support 7 switch hops and HP StorageWorks M-Series product line Switches support 3 switch hops.

- When implementing a SAN with these two switch product lines, both fabrics should be designed with a maximum of 3 switch hops.
- For HA applications, since servers will connect to both fabrics, common HBA/driver, multi-path software, and storage array firmware versions support are required.

---

**Note:** Dual Heterogeneous SAN Fabrics are not supported on MSA1000/MSA1500. Continuous Access/DRM configurations are supported with Dual Heterogeneous SAN Fabrics, including configurations extended with FCIP.

---

### Interoperable SAN Fabrics

#### B-Series with C-Series Switches

Within a single fabric, C-Series Director and Fabric switch models intermixed with B-Series switch models. The specific rules and configuration settings for each type of SAN fabric are described in the *Fabric Interoperability: Merging Fabrics Based on C-Series and B-Series Fibre Channel Switches Application Notes (AA-RVIZA-TE)*.



### B-Series with M-Series Switches

Within a single fabric, HP supports M-Series switch models intermixed with B-Series SAN switch models. The specific rules and configuration settings for each type of SAN fabric are described in the *Fabric Interoperability: Merging Fabrics Based on M-Series and B-Series Fibre Channel Switches Application Notes (AA-RUQQC-TE)*.

### C-Series with M-Series Switches

Within a single fabric, HP supports C-Series switch models intermixed with M-Series switch models. The specific rules and configuration settings for each type of SAN fabric are described in the *Fabric Interoperability: Merging Fabrics Based on C-Series and M-Series Fibre Channel Switches Application Notes (AA-RVH9B-TE)*.

These documents are available at:

<http://h18006.www1.hp.com/products/storageworks/san/documentation.html>

---

**Note:** Refer to the Application Notes above for a list of specific products supported in interoperable SAN Fabrics. Interoperable SAN Fabrics are not supported on MSA1000 or in Continuous Access/DRM configurations.

---

## Third party switch support

Third party switches and connectivity reliability have been verified through testing. However, support is subject to the following:

- No support for third party switch functionality. Customers will need to work directly with the third party switch support organization to fix a switch defect.
- HP will make a best effort attempt to help the customer resolve issues as they pertain to the HP supported products within the environment.
- HP can support switches and additional functionality resold through other vendors providing the customer purchases 3rd party support through the HP SAN Environmental Services Group (SAN-ES). Refer to <http://3so.gr.hp.com/N3SOPSM/snes/PSPs.htm> for additional information.

Examples of third party switches are:

- EMC Connectrix ED-1032
- InRange FC 9000

## 1 and 2 Gbps Fabric Topology Recommendations

There are no specific topology rules related to mixing of 1 and 2 Gbps components in a fabric. HP does however strongly recommend these guidelines be followed.

- When using both 1 and 2 Gbps switches in the same fabric, utilize 2 Gbps switches in the core for Core to SAN switch or Director to edge switch topologies.
- Connect 2 Gbps switches together to take advantage of the optional ISL Trunking feature when using Fibre Channel switch models that support this feature.
- Utilize 2 Gbps switches for connections to 2 Gbps capable devices. In general, for SANs with both 1 Gbps and 2 Gbps components, the transfer rate between devices and ports on switches is determined by the speeds supported by the individual ports that are connected. If two 2 Gbps devices or switch ports are connected together, the speed will be 2 Gbps for that segment in the fabric. If two 1 Gbps devices or switch ports are connected together the

speed will be 1 Gbps for that segment in the fabric. If a 2 Gbps and a 1 Gbps port are connected together the speed will be 1 Gbps for that segment. Refer to the section [General Fabric Performance Recommendations](#) in this chapter for more information.

- Zoning rules, SAN security, and SAN management for 2 Gbps switches are the same as for 1 Gbps switches.

## SAN Fabric Zoning Rules

The fabric zoning feature is supported with all HP Fibre Channel switch models. Zoning can be used to logically separate devices and different hardware platforms and operating systems in the same physical SAN. Use of zoning is required under these specific conditions:

- When mixing different storage system models and servers in the same SAN fabric. Refer to Chapter 4, “[Heterogeneous SAN Platform and Storage System Rules](#)” for more information.
- When mixing different hardware platforms, operating systems or storage systems that are currently only supported in homogenous SANs, and it is unknown whether there are interaction problems. Refer to Table 32 for specific information about zoning in heterogeneous SANs.
- When there are known interaction problems between different hardware platforms or operating systems and specific storage system types.
- When the number of nodes or ports in the SAN fabric exceeds a storage system connection support limit. There is a connection limit for storage systems using the EVA5000/EVA3000 (HSV controller) or EMA/ESA/MA/RA (HSG60/80 controller). The version of VCS or ACS controller code determines the specific limit.
- Overlapped zones are supported. Refer to the specific platform and storage system rules for more information.
- The maximum number of zones supported in a SAN fabric is based on the specific switch product line in use. Refer to the fabric and switch model maximums for each switch product line for more information.
- When using a SAN Management Appliance (see the next section.)

## Storage Management Appliance Rules and Recommendations

Whenever a Storage Management Appliance is placed in a fabric it is recommended that a dedicated storage management zone be created. This zone is specifically for the Storage Management Appliance and the elements it is to monitor and manage.

Currently, the Storage Management Appliance communicates with the EVA5000/EVA3000 (HSV controller) and EMA/ESA12000, EMA16000, MA/RA8000, MA6000 storage systems (HSG controller) in-band, that is, within the Fibre Channel fabric itself. It is not necessary or recommended to include either the switch WWNs or server HBA WWNs in this zone. Management communication to these devices from the Storage Management Appliance is done out-of-band or outside the fabric via TCP/IP.

For example, create a zone called SANAPP\_1\_ZONE that would contain the Appliance host bus adapter WWN and the WWNs of all the HSG or HSV controllers managed by this Storage Management Appliance. Because fabric devices can be in multiple zones, this will have no effect on other zones containing the same HSG and HSV controller WWNs.

1. Within the same fabric, EVA5000/EVA3000s with V2.0x and V3.0x can be managed by the same instance of Command View EVA. A separate appliance is needed to manage an EVA5000/EVA3000 with V1.0x.

2. Any EVA storage system can only have one active SMA managing it. Any standby SMA can be powered on, but the Command View EVA or Continuous Access user interface must not control the storage system. For further information, refer to the [HP StorageWorks Continuous Access EVA Operations Guide](#) available on the HP web.
3. A Storage Management Appliance is required to manage EVA5000/EVA3000s. For EMA/ESA12000, EMA16000, MA/RA8000, MA6000 storage systems, it is recommended that a Storage Management Appliance be used to manage the SAN when a fabric contains more than four Fibre Channel switches. It is required when using the HSG element manager.
4. Multiple appliances per fabric are allowed as long as only one appliance is accessing a controller pair at a time. Zoning is required to actively isolate an appliance and its controllers from other appliances and their controllers.
5. Element Manager for HSG may manage up to 25 HSG controller pairs per appliance. Command View for HSV may manage up to 16 HSV controller pairs per appliance.
6. The HSV and HSG Element Managers can operate in a dual fabric configuration.
7. A license key is required for each EVA5000/EVA3000 managed by the Storage Management Appliance. Additional licenses are required to take advantage of value added software functionality.
8. For SANs with more than 1024 HBAs, an HSV controller must be zoned so that it can see no more than 1024 HBAs. It may be necessary to add a zone to a SAN to satisfy the 1024 HBA limit.

Refer to Chapter 4, “[Heterogeneous SAN Platform and Storage System Rules](#)”, for rules about mixing specific platforms in a Heterogeneous SAN without the need for fabric zoning.

## SAN Component Interconnect Descriptions and Rules

The following sections describe rules for SAN component interconnects—switch port interfaces and physical cabling.

### Fibre Channel Switch Interface Usage Descriptions

- E-Port interface for Fibre Channel switch to switch, switch to gateway, or switch to bridge connectivity (also referred to as ISLs).
- EX-Port - Enhanced E-Port used to connect a Fibre Channel router to an edge fabric
- F-Port interface for fabric attached device—initiators (host bus adapters) and targets (storage ports)
- FL-Port interface for public loop fabric-aware, 24-bit Fibre Channel addressable devices—initiators or Compaq FC-AL Switch 8 SAN attachment
- FL-Port interface for private loop 8-bit Fibre Channel addressable devices—private FC-AL initiators and targets. This requires use of the B-Series product line switches QuickLoop Feature. This is a license-enabled feature on certain switch models, refer to the specific switch model product documentation for information about support of this feature. Typically this feature is only required when a specific platform can only be configured with a private FC-AL host bus adapter driver.
- G-Port, default interface when no devices appear to be attached to the port.

### Access with QuickLoop

The QuickLoop switch feature allows private FC-AL initiators and targets configured in a QuickLoop to communicate with each other through the switch. Since all initiators configured *inside* a QuickLoop are private they cannot communicate with targets outside of the QuickLoop. QuickLoop is only supported on the B-Series product line of Fibre Channel switch models when used with MA6000, MA8000, RA8000, EMA12000/16000, and ESA12000 RAID Array systems.

### Fiber Optic Interconnect Rules

1. 2 Gbps components utilize industry standard “LC” connectors for the Fibre Channel optical connections. 1 Gbps components utilize industry standard “SC” connectors. Cables and adapters are available with SC connectors on one end and LC connectors on the other end. Refer to the 2 Gbps switch QuickSpecs documents for additional information.

---

**Note:** Certain fiber optic cable configurations may require the use of SC or LC connector sleeves to couple two cable connector ends together such as when using wall jacks or connecting to existing pre-installed cables. Duplex couplers are available from various manufacturers. Use of these couplers is supported provided the overall cable losses specified in this chapter are not exceeded in the cable segment that includes the couplers.

---

2. The minimum allowable bend radius of fiber optic cable is 25 mm for 50, 62.5, and 9 micron fiber optic cable.

3. There is a minimum fiber optic cable segment length between Fibre Channel devices (a transmitter and a receiver). The minimum length is 0.5 meters for 50 and 62.5 micron cable and 2.0 meters for 9 micron cable. The minimum length does not apply to patch cords through a passive patch panel; it only applies to the total distance between the transmitter and receiver of the devices being connected through the patch panel.
4. For longer 50-micron short wave multi-mode optical fiber cables up to 300 meters (2 Gbps) or up to 500 meters (1 Gbps), a third party vendor must be contacted. The cables must be duplex, tight buffered multi-mode 50/125  $\mu\text{m}$  (Belcore GR-409 compliant) and the connectors must be SC or LC duplex low metal Belcore and IEC compliant.
5. For 9-micron long wave single-mode optical fiber cables up to 100 km (1 Gbps) or 35 km (2 Gbps), a third party vendor must be contacted. The cables must be duplex, tight buffered, single-mode 9/125  $\mu\text{m}$  (Belcore GR-409 compliant) and the connectors must be SC or LC duplex low metal (NTT-SC Belcore 326, IEC-874-19 SC compliant).
6. The mixing of 9-micron, 50-micron, and 62.5-micron fiber cables in the same cable segment is not supported.
7. Extended Fabrics – See Chapter 7, [SAN Extension](#). Also refer to the *Extended Fabric User Guide, AA-RR7QA-TE*, for more information.

## 4 Gbps Fiber Optic Interconnects/Distance Rules

1. Up to 150 meters maximum distance per cable segment between switches using 50/125 micron multi-mode fiber optic cable and short wavelength SFPs.
2. Up to 70 meters maximum distance per cable segment between switches using 62.5/125 micron multi-mode fiber optic cable and short wavelength SFPs.

---

**Note:** Information on the use of 62.5 micron fiber optic cable is provided to facilitate use of previously installed cable. HP recommends 50 micron fiber optic cable for any new installation requiring multi-mode fiber.

---

## 2 Gbps Fiber Optic Interconnects/Distance Rules

1. Up to 300 meters maximum distance per cable segment between devices and switches or switches and switches using 50/125 micron multi-mode fiber optic cable and short wavelength SFPs
2. Up to 150 meters maximum distance per cable segment between devices and switches or switches and switches using 62.5/125 micron multi-mode fiber optic cable and short wavelength SFPs

---

**Note:** Information on the use of 62.5 micron fiber optic cable is provided to facilitate use of previously installed cable. HP recommends 50 micron fiber optic cable for any new installation requiring multi-mode fiber.

---

3. Up to 10 km (6.2 miles) maximum distance between two switches or B-Series switches and the MP Router using 9/125 micron single-mode fiber optic cable and long wavelength SFPs.
4. Up to 35 km (21.7 miles) maximum distance between two switches using 9/125 micron single-mode fiber optic cable and extended reach SFPs.

5. For B-Series product line switches:
  - Maximum of 160 km (100 miles) total distance across the SAN using multiple segments. This can be implemented using four 35km segments and two 10 km segments (6 hops.) In all cases the individual segments must be configured with the proper SFP and cable type and a maximum of 7 hops must not be exceeded across the SAN.
  - ISL connections up to 10 km are supported between 1Gb and 2Gb switches at the "L0" portcfglongdistance setting only.
6. For C-Series product line switches:
  - Maximum of 160 km (100 miles) total distance across the SAN using multiple segments. In all cases the individual segments must be configured with the proper SFP and cable type and a maximum of 3 hops.
7. For M-Series product line switches:
  - Maximum of 105 km (64 miles) total distance across the SAN using multiple segments. This can be implemented using three 35 km segments (3 hops.) In all cases the individual segments must be configured with the proper SFP and cable type and a maximum of 3 hops must not be exceeded across the SAN.

---

**Note:** WDM may be used to increase the switch-to-switch distance beyond the distances listed above. Refer to Chapter 7, [SAN Extension](#).

---

---

**Note:** Refer to the Data Replication Manager (DRM) solution documentation, including the DRM Design Guide, for specific interconnect and distance rules related to DRM configurations. See: <http://h18000.www1.hp.com/products/sanworks/drm/documentation.html>

---

---

**Note:** Refer to the Continuous Access EVA solution documentation, including the Continuous Access EVA Design Reference Guide, for specific interconnect and distance rules related to Continuous Access EVA configurations. See: <http://h18006.www1.hp.com/products/storage/software/conaccesseva/index.html>

---

## 1 Gbps Fiber Optic Interconnects/Distance Rules

1. Up to 500 meters maximum distance per cable segment between devices and switches or switches and switches using 50/125 micron multi-mode fiber optic cable and short wavelength GBICs or GLMs<sup>1</sup>.
2. Up to 200 meters maximum distance per cable segment between devices and switches or switches and switches using 62.5/125 micron, multi-mode fiber optic cable and short wavelength GBICs or GLMs<sup>1</sup>.

---

**Note:** Information on the use of 62.5 micron fiber optic cable is provided to facilitate use of previously installed cable. HP recommends 50 micron fiber optic cable for any new installation requiring multi-mode fiber.

---

---

1. GLMs are used in the HSG60 (MA6000) and HSG80 (MA/RA8000, EMA/ESA12000, EMA16000) storage controllers

3. For B-Series product line switches:
  - Up to 10 km (6.2 miles) maximum distance between any two switches using 9/125 micron single-mode fiber optic cable and long wavelength GBICs.
  - Up to 100 km (62 miles) distance between any two switches using 9/125 micron single-mode fiber optic cable and very long distance GBICs. A maximum of one 100 km very long distance segment per SAN.
  - Maximum of 160 km (100 miles) total distance across the SAN using multiple segments. This can be implemented using a single 100 km segment and six 10 km segments (7 hops) or other combinations such as two 50 km segments and five 10 km segments (7 hops). In all cases the individual segments must be configured with the proper GBICs and cable type and the maximum of 7 hops must not be exceeded across the SAN.
  - ISL connections up to 10 km are supported between 1Gb and 2Gb switches at the "L0" portcfglongdistance setting only.
4. For C-Series product line switches:
  - Maximum of 30 km (18.6 miles) total distance across the SAN using multiple segments. This can be implemented using three 10 km segments (3 hops.) In all cases, each segment must be configured with the proper SFP and cable type and a maximum of 3 hops.
5. For M-Series Fabric product line switches:
  - Up to 10 km (6.2 miles) maximum distance between any two switches using 9/125 micron single-mode fiber optic cable and long wavelength SFPs.
  - Up to 35 km (21.7 miles) maximum distance between two switches using 9/125 micron single-mode fiber optic cable and extended reach SFPs.
  - Maximum of 105 km total distance across the SAN using multiple segments. This can be implemented using three 35 km segments (3 hops.) In all cases the individual segments must be configured with the proper SFP and cable type and a maximum of 3 hops must not be exceeded across the SAN.

---

**Note:** WDM may be used to increase the switch-to-switch distance beyond the distances listed above. Refer to Chapter 7, [SAN Extension](#).

---

---

**Note:** Refer to the Data Replication Manager (DRM) solution documentation, including the DRM Design Guide, for specific interconnect and distance rules related to DRM configurations. See: <http://h18000.www1.hp.com/products/sanworks/drm/documentation.html>

---

---

**Note:** Refer to the Continuous Access EVA solution documentation, including the Continuous Access EVA Design Reference Guide, for specific interconnect and distance rules related to Continuous Access EVA configurations. See: <http://h18006.www1.hp.com/products/storage/software/conaccesseva/index.html>

---

## Fiber Optic Cable Loss Budgets

The information in this section is based on the Fibre Channel Physical Interface Specification. Refer to the specification document for more information. The maximum distances specified are based on the use of nominal bandwidth fiber optic cable. This specifies modal bandwidth of 500 MHz-km for 50 micron fiber optic cable, and 200 MHz-km for 62.5 micron fiber optic cable.

**Note:** Media losses are not specified due to variances between different fiber optical cable manufacturers. In all cases the specification that must be followed is the total channel insertion loss, which includes media losses.

**Note:** Information on the use of 62.5 micron fiber optic cable is provided to facilitate use of previously installed cable. HP recommends 50 micron fiber optic cable for any new installation requiring multi-mode fiber.

**Table 27: Optical Cable Losses**

Speed	Cable	Maximum Distance	Total Channel Insertion Loss <sup>1</sup>	Loss per Mated Connector Pair	Notes
4 Gbps	62.5/125 micron	70 meters	1.78 dB	0.75 dB	
4 Gbps	50/125 micron	150 meters	2.06 dB	0.75 dB	
2 Gbps	62.5/125 micron	150 meters	2.1 dB	0.75 dB	
2 Gbps	50/125 micron	300 meters	2.62 dB	0.75 dB	
2 Gbps	9/125 micron	10 km	7.8 dB	0.75 dB	
2 Gbps	9/125 micron	35 km	19 dB	0.75 dB	
1 Gbps	62.5/125 micron	200 meters	3.0 dB	0.75 dB	
1 Gbps	50/125 micron	500 meters	3.85 dB	0.75 dB	
1 Gbps	9/125 micron	10 km	7.8 dB	0.75 dB	
1 Gbps	9/125 micron	100 km	21.5 dB	0.75 dB	A minimum loss of 8 dB is required

1. Channel insertion loss is the combined passive loss from connectors, splices, and media between the transmitter and receiver.

Use of optical fiber patch panels is supported provided the total channel insertion loss between the transmitter and receiver for the cable segment routed through the patch panel does not exceed the maximum listed for the connector and cable type in use.



**Table 28: Storage Product Interconnect/Transport Support**

Interface/ Transport	Storage Product		
	Heterogeneous SAN	DRM and Continuous Access EVA	Enterprise Backup Solutions (EBS)
2 Gbps Fibre Channel via 50 micron multi-mode fiber optic cable and short-wave SFPs	Up to 300 meters per cable segment. Refer to <a href="#">2 Gbps Fiber Optic Interconnects/Distance Rules</a> , page 103, for maximum supported distance across the SAN.	Up to 300 meters per cable segment. Refer to <a href="#">2 Gbps Fiber Optic Interconnects/Distance Rules</a> , page 103, for maximum supported distance across the SAN.	Up to 300 meters per cable segment. Refer to <a href="#">2 Gbps Fiber Optic Interconnects/Distance Rules</a> , page 103, for maximum supported distance across the SAN.
2 Gbps Fibre Channel via 62.5 micron multi-mode fiber optic cable and short-wave SFPs	Up to 150 meters per cable segment. Refer to <a href="#">2 Gbps Fiber Optic Interconnects/Distance Rules</a> , page 103, for maximum supported distance across the SAN.	Up to 150 meters per cable segment. Refer to <a href="#">2 Gbps Fiber Optic Interconnects/Distance Rules</a> , page 103, for maximum supported distance across the SAN.	Up to 150 meters per cable segment. Refer to <a href="#">2 Gbps Fiber Optic Interconnects/Distance Rules</a> , page 103, for maximum supported distance across the SAN.
2 Gbps Fibre Channel via 9 micron single-mode fiber optic cable and long-wave SFPs	Up to 10 km per cable segment. Refer to <a href="#">2 Gbps Fiber Optic Interconnects/Distance Rules</a> , page 103, for maximum supported distance across the SAN.	Up to 10 km per cable segment. Refer to <a href="#">2 Gbps Fiber Optic Interconnects/Distance Rules</a> , page 103, for maximum supported distance across the SAN.	Up to 10 km per cable segment. Refer to <a href="#">2 Gbps Fiber Optic Interconnects/Distance Rules</a> , page 103, for maximum supported distance across the SAN.
2 Gbps Fibre Channel via 9 micron single-mode fiber optic cable and extended reach SFPs	Up to 35 km per cable segment. Refer to <a href="#">2 Gbps Fiber Optic Interconnects/Distance Rules</a> , page 103, for maximum supported distance across the SAN.	Up to 35 km per cable segment. Refer to <a href="#">2 Gbps Fiber Optic Interconnects/Distance Rules</a> , page 103, for maximum supported distance across the SAN.	Up to 35 km per cable segment. Refer to <a href="#">2 Gbps Fiber Optic Interconnects/Distance Rules</a> , page 103, for maximum supported distance across the SAN.
1 Gbps Fibre Channel via 50 micron multi-mode fiber optic cable and short-wave GBICs	Up to 500 meters per cable segment. Refer to <a href="#">1 Gbps Fiber Optic Interconnects/Distance Rules</a> , page 104, for maximum supported distance across the SAN.	Up to 500 meters per cable segment. Refer to <a href="#">1 Gbps Fiber Optic Interconnects/Distance Rules</a> , page 104, for maximum supported distance across the SAN.	Up to 500 meters per cable segment. Refer to <a href="#">1 Gbps Fiber Optic Interconnects/Distance Rules</a> , page 104, for maximum supported distance across the SAN.
1 Gbps Fibre Channel via 62.5 micron multi-mode fiber optic cable and short-wave GBICs	Up to 200 meters per cable segment. Refer to <a href="#">1 Gbps Fiber Optic Interconnects/Distance Rules</a> , page 104, for maximum supported distance across the SAN.	Up to 200 meters per cable segment. Refer to <a href="#">1 Gbps Fiber Optic Interconnects/Distance Rules</a> , page 104, for maximum supported distance across the SAN.	Up to 200 meters per cable segment. Refer to <a href="#">1 Gbps Fiber Optic Interconnects/Distance Rules</a> , page 104, for maximum supported distance across the SAN.
1 Gbps Fibre Channel via 9 micron single-mode fiber optic cable and long-wave GBICs	Up to 10 km per cable segment. Refer to <a href="#">1 Gbps Fiber Optic Interconnects/Distance Rules</a> , page 104, for maximum supported distance across the SAN.	Up to 10 km per cable segment. Refer to <a href="#">1 Gbps Fiber Optic Interconnects/Distance Rules</a> , page 104, for maximum supported distance across the SAN.	Up to 10 km per cable segment. Refer to <a href="#">1 Gbps Fiber Optic Interconnects/Distance Rules</a> , page 104, for maximum supported distance across the SAN.

**Table 28: Storage Product Interconnect/Transport Support (Continued)**

Interface/ Transport	Storage Product		
	Heterogeneous SAN	DRM and Continuous Access EVA	Enterprise Backup Solutions (EBS)
1 Gbps Fibre Channel via 9 micron single-mode fiber optic cable and very long distance GBICs	Up to 100 km per cable segment. Refer to <a href="#">1 Gbps Fiber Optic Interconnects/Distance Rules</a> , page 104, for maximum supported distance across the SAN.	Up to 100 km per cable segment. Refer to <a href="#">1 Gbps Fiber Optic Interconnects/Distance Rules</a> , page 104, for maximum supported distance across the SAN.	Up to 100 km per cable segment. Refer to <a href="#">1 Gbps Fiber Optic Interconnects/Distance Rules</a> , page 104, for maximum supported distance across the SAN.
1 Gbps and 2 Gbps Fibre Channel via Wavelength Division Multiplexing (WDM)	Supported up to 160 km total distance across the SAN. Refer to the <a href="#">SAN Extension</a> Chapter.	Supported up to 160 km total distance across the SAN. Refer to the <a href="#">SAN Extension</a> Chapter.	Supported up to 160 km total distance across the SAN. Refer to the <a href="#">SAN Extension</a> Chapter.
ATM over single T1/E1 Wide Area Network (WAN)	Not Supported	Supported, refer to <a href="#">page 167</a> . Supported on DRM using an FC to ATM convertor with no limit on delay, and as the intersite backbone for Continuous Access EVA with an FC to IP convertor with up to 100 ms of IP network delay. Assumes a single T1/E1 per fabric in a dual fabric. Not supported as a single ISL in a single fabric implementation.	Not Supported
ATM over single T1/E1 WAN (Inverse Multiplexing)	Not Supported	Supported, refer to <a href="#">page 167</a> . Supported on DRM using an FC to ATM convertor with no limit on delay, and as the intersite backbone for Continuous Access EVA with an FC to IP convertor with up to 100 ms of IP network delay. Assumes a single T1/E1 per fabric in a dual fabric. Not supported as a single ISL in a single fabric implementation.	Not Supported
ATM over T3/E3 WAN	Not Supported	Supported. Refer to <a href="#">page 167</a> . Supported on DRM using an FC to ATM convertor with no limit on delay, and as the intersite backbone for Continuous Access EVA with an FC to IP convertor with up to 100 ms of IP network delay.	Not Supported
ATM over fractional and/or shared T3/E3 and OC3 WAN	Not Supported	Supported. Refer to <a href="#">page 167</a> . Supported on DRM using an FC to ATM convertor with no limit on delay, and as the intersite backbone for Continuous Access EVA with an FC to IP convertor with up to 100 ms of IP network delay.	Not Supported

**Table 28: Storage Product Interconnect/Transport Support (Continued)**

Interface/ Transport	Storage Product		
	Heterogeneous SAN	DRM and Continuous Access EVA	Enterprise Backup Solutions (EBS)
10/100 Copper Ethernet FC over IP (FCIP)	Supported on EVA, EMA/ESA12000, EMA16000, MA/RA8000 and MA6000 with up to 100 ms of IP network delay. MSA1000/MSA1500 supported up to 160 km total Fibre Channel distance.	Supported on DRM and Continuous Access EVA with up to 100 ms of IP network delay.	Not Supported
1 Gbps Optical Ethernet FC over IP (FCIP)	Supported on EVA, EMA/ESA12000, EMA16000, MA/RA8000 and MA6000 with up to 100 ms of IP network delay. MSA1000/MSA1500 supported up to 160 km total Fibre Channel distance.	Supported on DRM and Continuous Access EVA with up to 100 ms of IP network delay.	Not Supported
Fibre Channel Routing using the HP MP Router	Supported on EVA, XP, VA, EMA/ESA12000, EMA16000, MA/RA8000, MA6000 MSA1000/MSA1500 up to 160 km total Fibre Channel distance. Maximum of 10 km distance between an MP Router and an edge fabric.	See below when combining Fibre Channel Routing with FCIP.	Supported
FCIP SAN Extension using the HP MP Router	Supported on EVA, XP, VA, EMA/ESA12000, EMA16000, MA/RA8000, MA6000 MSA1000/MSA1500 up to 160 km total Fibre Channel distance. Maximum of 10 km distance between an MP Router and an edge fabric.	Supported on Continuous Access EVA and Continuous Access XP with up to 100ms of IP network delay. Maximum of 10 km distance between an MP Router and an edge fabric.	Not Supported
iSCSI bridging using the HP SR2122-2 IP storage router or the C-Series MDS IP Services Module	Supported on EVA, XP, VA, EMA/ESA12000, EMA16000, MA/RA8000, MA6000, and MSA1000/MSA1500 supported up to 160 km total Fibre Channel distance.	Not Supported	Not Supported
FCIP SAN extension using the HP SR2122-2 IP storage router	Supported on EVA, XP, VA, EMA/ESA12000, EMA16000, MA/RA8000 and MA6000 with up to 100 ms of IP network delay and up to 160 km total Fibre Channel distance. MSA1000/MSA1500 supported up to 160 km total Fibre Channel distance.	Supported on DRM, Continuous Access EVA, and Continuous Access XP with up to 100ms of IP network delay.	Supported with EBS with up to 100ms of IP network delay.
FCIP SAN extension using the C-Series MDS IP Services Module	Supported on EVA, XP, EMA/ESA12000, EMA16000, MA/RA8000 with up to 100 ms of IP network delay.	Supported on DRM, Continuous Access EVA, and Continuous Access XP with up to 100ms of IP network delay.	Not Supported

**Note:** For information on all HP supported DRM and Continuous Access SAN extension products refer to the HP StorageWorks Continuous Access And Data Replication Manager SAN Extensions available at:

<http://h18000.www1.hp.com/products/storageworks/san/documentation.htm>

---

## General Fabric Performance Recommendations

The performance of an application on a heterogeneous SAN is usually seen from the perspective of "storage performance". The intervening SAN and competing workloads are not usually considered. The fact is that the performance of the storage will be dependent on the interaction of all the components and applications in the SAN. Some of the possible component limiting factors include the host CPU(s), Fibre Channel HBA, SAN topology, SAN traffic, RAID controllers, or the specific configuration of disks used behind the controllers. This is a dynamic workload environment and at any given moment any part of the SAN can dominate the performance. This complexity can be simplified if the environment is divided into the categories of servers, SAN infrastructure, and data storage devices. This document is primarily interested in the SAN infrastructure. There are issues with storage and servers that are unique to SAN implementations and we will address some of those as well.

## SAN Infrastructure Performance

For the purposes of discussion assume a multi-switch fabric, since single switches always offer the highest performance with minimum latency. A multi-switch fabric has two factors that decrease overall fabric-wide infrastructure performance:

- latency through multiple switches (hops)
- oversubscription or congestion of ISLs

Performance testing and measurement by HP has shown switch latency to be less than 5% (at 1 Gbps) of the time lost due to congestion of a full frame from another path. This implies that the number of switches and hops between devices is not a major factor for performance. However, as devices send frames through more switches and hops, the chances are increased that other traffic in the SAN may be routed over the same ISL/path. This may decrease performance due to oversubscription of a particular ISL/path that is serving multiple devices.

Oversubscription has been determined to be the largest contributing factor to reduced Fibre Channel performance. When devices must contend for the same ISL or path, the best result will be that each competing device will receive  $1/n$  of the available bandwidth on the path (where  $n$  is the number of contending devices).

While the topology and size of the SAN have been seen to affect performance, staying within the rules and recommendations outlined in this guide minimizes these factors. The topology designs have been defined to accommodate a particular data access or data locality type. Recommendations on the number of ISLs based on device-to-device access ratios serve to ensure that adequate bandwidth is available across the SAN, minimizing oversubscription.

HP recommends following these guideline in configuring your SAN.

- Whenever possible, devices that exchange the highest amount of data should be connected to the same Fibre Channel switch.
- For high bandwidth, the number of application servers should be balanced with storage by using as much one-to-one access as possible
- When devices exchanging data are on different switches:
  - Minimize the number of hops between devices

- For high bandwidth (large transfer size) applications, configure a maximum of two active storage controller ports per ISL
- For high throughput (small transfer size) applications, configure a maximum of 20 active storage controller ports per ISL
- For mixed applications, configure a maximum of 4 active storage controller ports/ ISL

## Performance Considerations for Mixed 1 Gbps and 2 Gbps SAN Fabrics

For SAN fabrics consisting of a mixture of 1 and 2 Gbps switches and devices, the individual fabric segment connections negotiate the speed at which specific devices communicate. The presence of 1 Gbps devices in a fabric will not force other independent 2 Gbps devices to a lower speed. That is, switch ports or user ports in a fabric capable of 2 Gbps will always communicate at their highest supported speed, 2 Gbps, when connected to other switch or user ports capable of 2 Gbps. The sustained data rate between the devices will be 200 MB/second assuming the entire path between the devices through the fabric is capable of 2 Gbps.

If you have 1 Gbps and 2 Gbps devices connected to the same 2 Gbps switch, or if an intermediate path or route between devices is 1 Gbps, the switch will buffer data coming from the 2 Gbps device to prevent overrunning the 1 Gbps port or device. Over time the sustained data rate will be 100 MB/second.

It is recommended that devices capable of 2 Gbps always be connected to 2 Gbps switches and other 2 Gbps devices. Ensure that the entire path or route between 2 Gbps devices consists of 2 Gbps capable ports.

On the C-Series switches ensure that Fibre-Channel Congestion Control (FCC) is enabled on all the switches. The FCC is a feature of the C-Series switches which allows these switches to intelligently regulate traffic across ISLs and ensure each host-target pair of devices will have the required bandwidth for data transfer. The C-Series switches also have the ability to prioritize frames originating from a particular port hence applications can be prioritized using the Quality of Service (QOS) feature.

## Performance Specifications

Contact your HP representative for specific product performance information.

